


4WD CONTROL MODULE REMOVAL/INSTALLATION [L3 Turbo]

id0318a2806000

L.H.D.

1. Disconnect the negative battery cable.
2. Remove the lower panel.
3. Remove in the order indicated in the table.

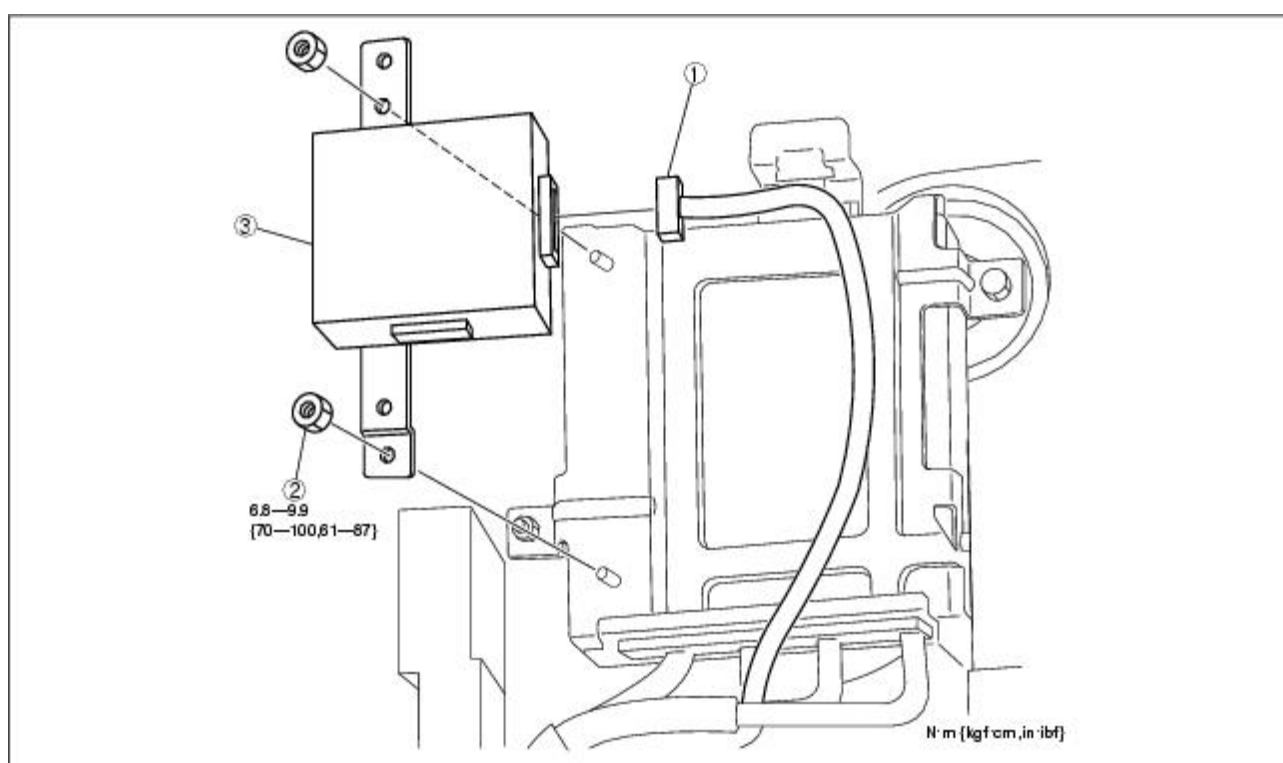

D6 E318 2N7 000

1	Connector
2	Nut
3	4WD CM

4. Install in the reverse order of removal.